



CONSENT

PETBAND®
Polyester Strapping

UK & Ireland Agents
Robert Walter CTS
www.rwcts.net
00353 87 629 1950 Robert
00353 87 632 6318 Tim




CONSENT Packaging is part of CONSENT GROUP, which was established in 1975. CONSENT Packaging has state of the art machinery imported from Europe to manufacture High Tensile PET Strapping. The 250,000 square foot facility has the largest production capacity in the Middle East and is able to supply a superior quality strap world wide.

CONSENT Packaging manufactures a wide range of Polyester Straps under the brand name PETBAND®. PETBAND® meets ASTM standard D3950 and is available in different sizes, colors along with the additional option of printing directly on the straps.


Benefits of PETBAND® polyester straps :

- Less expensive than steel on a cost per meter basis.
- Weather resistant - will not rust or stain products.
- Superior impact resistance, withstands shock force and takes 2.5 times the energy to break relative to steel.
- Retains tension with elastic memory.
- Safer with no sharp edges.
- 80% lighter than steel strapping.
- Requires less floor space for storage.
- Superior liability.
- Minimal elongation.
- Compatible in all major packaging equipment.
- 100% recyclable.

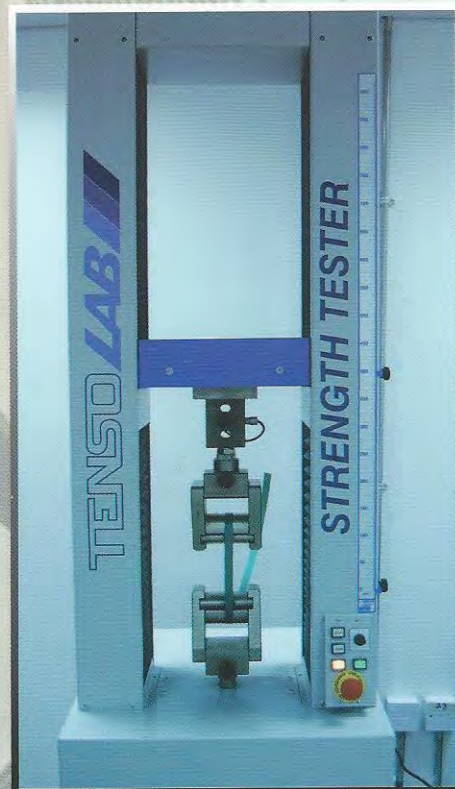

QUALITY

PETBAND® Polyester Strap is manufactured with stringent quality standards and uses the best testing machinery for checking raw materials. In-process and final product.

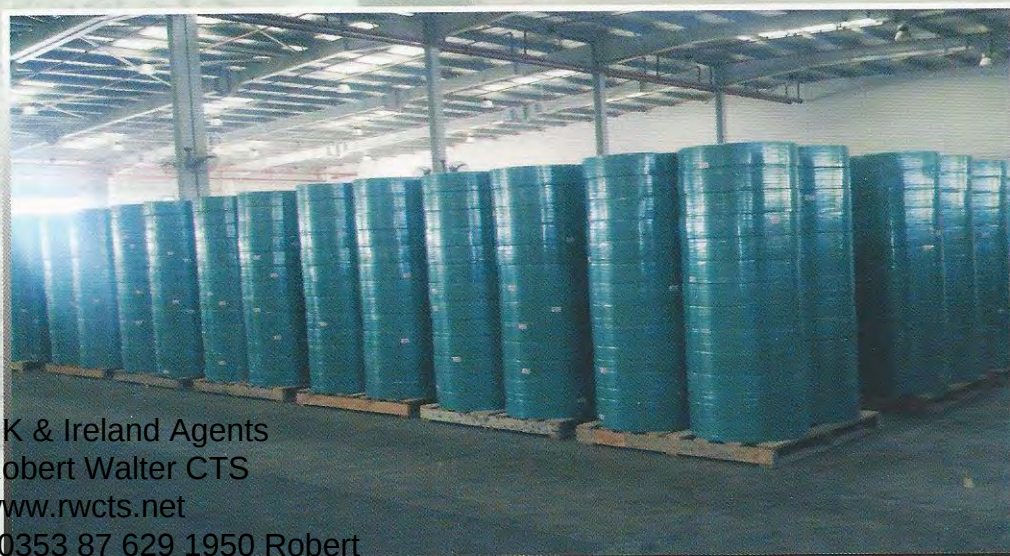

UK & Ireland Agents
Robert Walter CTS
www.rwcts.net
00353 87 629 1950 Robert
00353 87 632 6318 Tim



PETBAND® PRODUCTION LINE



Fully automatic winding controlled by PLC,
ensuring 100% length per coil as specified.
UK & Ireland Agents
Robert Walter CTS
www.rwcts.net
00353 87 629 1950 Robert
00353 87 632 6318 Tim

Premium PETBAND® Straps

The Premium grade PETBAND® Polyester Strap is a viable alternative for steel strapping in many heavy-duty applications.

Reference	Nominal Size mm		Break Load		Coil Length
Code	Width	Thickness	Kgf	N	mts
PR 9560E	9.5	0.6	215	2111	2820
PR 1260E	12.0	0.6	253	2480	2400
PR 1270E	12.0	0.7	313	3068	1940
PR 1280E	12.0	0.8	357	3502	1700
PR 1290E	12.0	0.9	380	3720	1600
PR 1580E	15.5	0.8	467	4578	1300
PR 1590E	15.5	0.9	506	4960	1200
PR 1610E	15.5	1.0	578	5669	1050
PR 1611E	15.5	1.1	639	6266	950
PR 1910E	19.1	1.0	715	7003	850
PR 1911E	19.1	1.1	779	7632	780
PR 1912E	19.1	1.2	856	8384	710
PR 1913E	19.1	1.3	934	9158	650


Standard PETBAND® Straps

The Standard grade PETBAND® Polyester Strap is designed for light and medium duty applications. It can be applied by hand tools or power strapping equipment.

Reference	Nominal Size mm		Break Load		Coil Length
Code	Width	Thickness	Kgf	N	mts
ST 1270E	12.0	0.7	268	2627	1940
ST 1280E	12.0	0.8	306	2998	1700
ST 1290E	12.0	0.9	325	3185	1600
ST 1580E	15.0	0.8	366	3586	1500
ST 1590E	15.5	0.9	433	4247	1200
ST 1610E	15.5	1.0	495	4853	1050
ST 1611E	15.5	1.1	547	5364	950
ST 1910E	19.1	1.0	612	5995	850
ST 1911E	19.1	1.1	667	6533	780
ST 1912E	19.1	1.2	732	7177	710
ST 1913E	19.1	1.3	800	7840	650

Surface : Embossed
Core Internal Diameter : 406 mm
Core Width : 152 mm
Packaging : 52 coils/pallet
Color : Green, black other colors available on request

APPLICATIONS

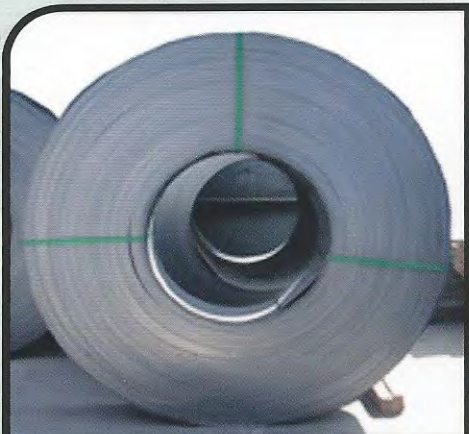

Steel



Concrete Products



Scaffolding



Aluminium



Wood & Timber



Logistics

OTHER APPLICATIONS

Furniture

Electronics

Ceramics

Blocks & Bricks

Can, Bottles, Glass

Textiles, Fibres

Paper & Printing

Plastic Pipe & Hose



For further information, please contact:

CONSENT, Head Office: Al Quoz Industrial Area 1

P.O. Box: 136, Dubai, UAE

Tel: +971 4 3472011, Fax : +971 4 3472957

E-mail: consent@eim.ae Website: www.consent.ae

UK & Ireland Agents
Robert Walter CTS
www.rwcts.net
00353 87 629 1950 Robert
00353 87 632 6318 Tim